

11329

FORD FUSION, MERCURY MILAN  
MAZDA 6, 06 LINCOLN ZEPHYR / 07-CURRENT MKZ

9/21/2012

GROSS LOAD CAPACITY WHEN USED AS A WEIGHT CARRYING HITCH: 2,000 LBS. TRAILER WEIGHT & 200 LBS. TONGUE WEIGHT.

\*\*\*DO NOT EXCEED VEHICLE MANUFACTURER'S RECOMMENDED TOWING CAPACITY.\*\*\*




WARNING: ALL NON-TRAILER LOADS APPLIED TO THIS PRODUCT MUST BE SUPPORTED BY AUXILIARY STABILIZING STRAPS.

\*\* FAILURE TO PROPERLY SUPPORT NON-TRAILER LOADS WILL VOID PRODUCT WARRANTY\*\*

HAVING INSTALLATION QUESTIONS? CALL TECHNICAL SUPPORT AT 1-800-798-0813

Parts List			
ITEM	QTY	PART NUMBER	DESCRIPTION
1	2	1/2-13 x 1 1/4	CARRIAGE BOLT
2	2	CM-SP12	.250 x 1.00 x 2.00" SQUARE HOLE SPACER
3	4	HFN 1213	HEX FLANGE NUT
4	2	1/2-13 x 1 1/2	CARRIAGE BOLT
5	2	CM-SP62	.250" SPACER PLATE
6	2	M8 - 1.25 x 30	HEX HEAD TAP BOLT
7	2	5/16"	WASHER
8	1	1/2"	FISHWIRE TOOL
9	2	5/16"	LOCK WASHER

**\*\* SPECIAL NOTE \*\***  
NOTCH FASCIA AS NEEDED TO PROVIDE CLEARANCE FOR HITCH

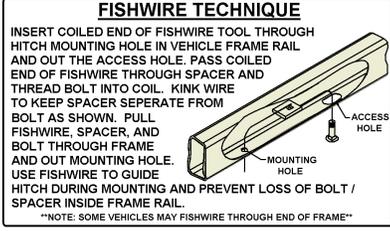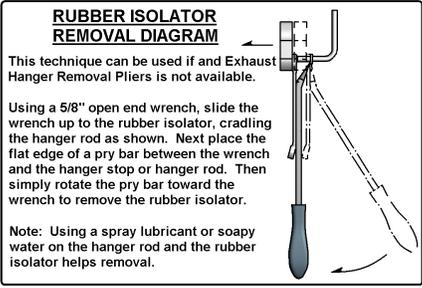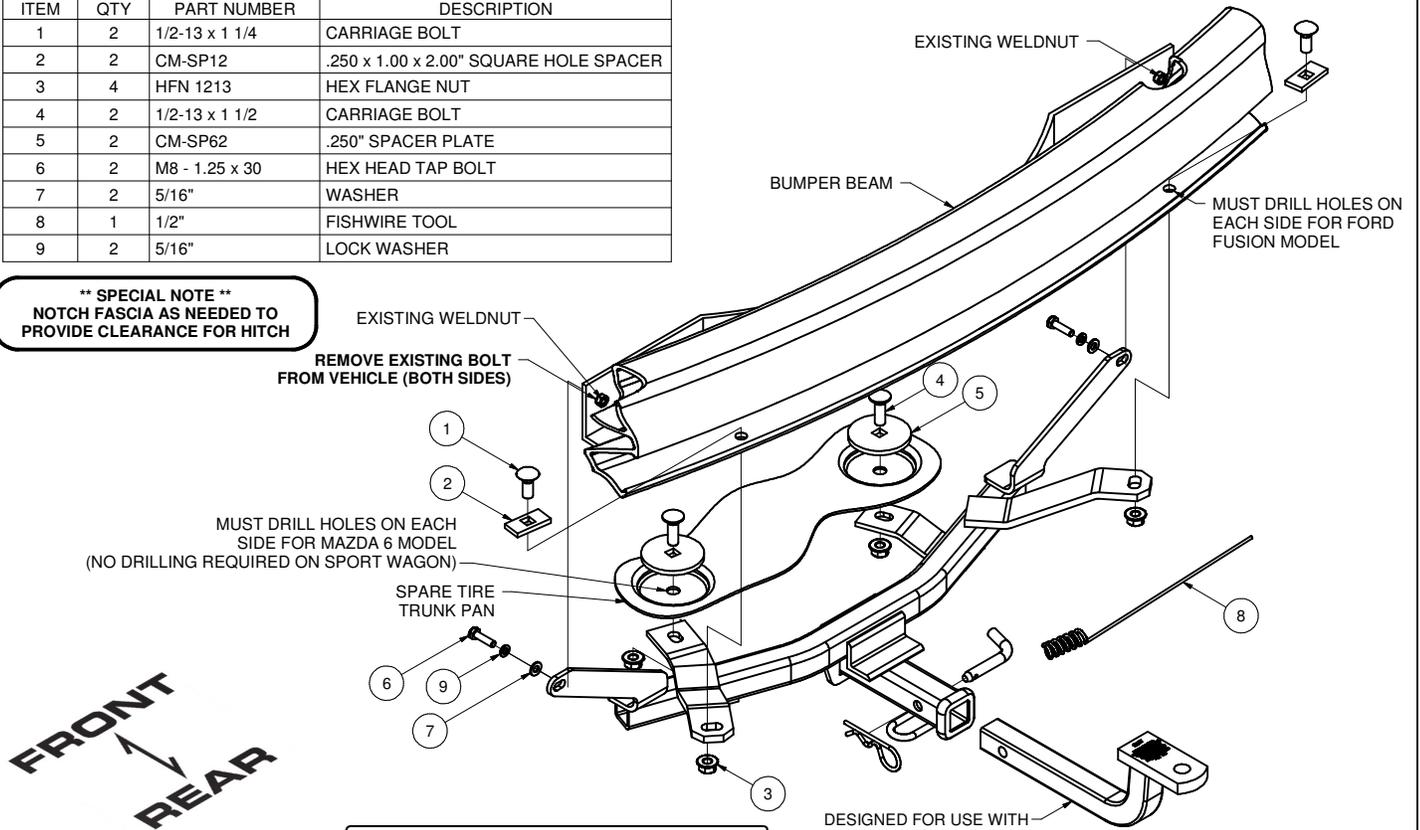

**HITCH WEIGHT:** 28 LBS.  
**INSTALL TIME**  
PROFESSIONAL: 45 MINUTES  
NOVICE (DIY): 90 MINUTES  
**INSTALL NOTES:**  
-MAY REQUIRE DRILLING  
-MAY REQUIRE FASCIA TRIMMING  
-LOWER EXHAUST

**INSTALLATION STEPS**

- 1) Lower mufflers, remove (2) 8mm hex bolts from bumper beam (as shown), and 2 rubber plugs from spare tire well.
- 2) Raise hitch into position over exhaust, aligning bumper beam weld nuts with each side plate.
- 3) Install supplied 8mm hex bolts, 5/16" lock washers, and 5/16" flat washers into bumper beam weld nuts.
- 4) Fishwire a 1/2" x 1 1/4" carriage bolt and CM-SP12 spacer into the bumper beam rail on both sides as shown.
- 5) Install remaining 1/2" carriage bolts and round spacers into spare tire well as shown. Use silicone caulk or equivalent to seal holes from exhaust fumes and water. (Note: Some models may require drilling for Steps 4 and 5)
- 6) Torque all 8mm fasteners to 23 ft-lbs. Torque all 1/2" fasteners to 110 ft-lbs.

**PERIODICALLY CHECK THIS RECEIVER HITCH TO ENSURE THAT ALL FASTENERS ARE TIGHT AND THAT ALL STRUCTURAL COMPONENTS ARE SOUND.**

Curt Manufacturing Inc., warrants this product to be free of defects in material and/or workmanship at the time of retail purchase by the original purchaser. If the product is found to be defective, Curt Manufacturing Inc., may repair or replace the product, at their option, when the product is returned, prepaid, with proof of purchase. Alteration to, misuse of, or improper installation of this product voids the warranty. Curt Manufacturing Inc.'s liability is limited to repair or replacement of products found to be defective, and specifically excludes liability for incidental or consequential loss or damage.