

11368**KIA FORTE SEDAN****6/26/2020****GROSS LOAD CAPACITY WHEN USED AS A WEIGHT CARRYING HITCH: 2000 LBS. TRAILER WEIGHT & 200 LBS. TONGUE WEIGHT.**

DO NOT EXCEED VEHICLE MANUFACTURER'S RECOMMENDED TOWING CAPACITY.

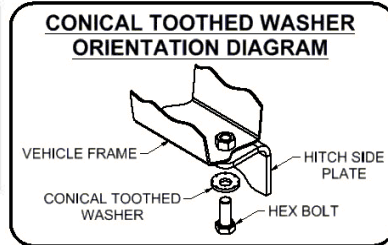
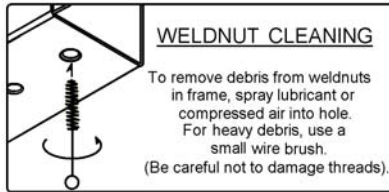
WARNING: ALL NON-TRAILER LOADS APPLIED TO THIS PRODUCT MUST BE SUPPORTED BY 18050 STABILIZING STRAPS.

** FAILURE TO PROPERLY SUPPORT NON-TRAILER LOADS WILL VOID PRODUCT WARRANTY**

HAVING INSTALLATION QUESTIONS? CALL TECHNICAL SUPPORT AT 1-877-287-8634

Parts List			
ITEM	QTY	PART NUMBER	DESCRIPTION
1	4	10-10373	HHCS,M10X1.25,25,CL10.9,YZ
2	6	30-00148	WASHER,S-CON,3/8,YZ
3	2	20-00166	NUT,HEX,3/8-16 UNC,GRD8,YZ
4	1	3_8 - 16 x 2.25 x 1.00	U-BOLT

TOOLS REQUIRED
SCREW DRIVER
RATCHET
9/16", 10mm, and 17mm SOCKET
TORQUE WRENCH
WIRE PIPE BRUSH

PASSENGER SIDE
FRAME RAILDRIVER SIDE
FRAME RAILEXISTING WELDNUTS
(BOTH SIDES)VEHICLE
TOW LOOP

1 2

4

3

DESIGNED FOR USE WITH
BALLMOUNT #45521 (D-21)DESIGNED FOR USE WITH EURO BALLMOUNT
#45571 (1 7/8" BALL) OR #45572 (2" BALL)FRONT
↑
REAR

HITCH WEIGHT: 26 LBS.

INSTALL TIME

PROFESSIONAL: 20 MINUTES

NOVICE (DIY): 40 MINUTES

INSTALL NOTES:

- LOWER EXHAUST
- WELD NUT CLEANING
- REMOVE UNDER BODY PANEL

INSTALLATION STEPS

1. Remove underbody panel on the driver side of vehicle by removing (4) M10 nuts and (3) push fasteners. Return fasteners and underbody panel to customer.
2. Lower exhaust by disconnecting the rubber isolator from the exhaust hanger.
3. Raise hitch into place by lifting the passenger side in to position followed by the driver side and loosely secure tow loop attachment point with the u-bolt provided.
4. Loosely secure the (4) M10 bolts supplied into weldnuts in the vehicle frame (weld nut cleaning with a wire brush or lubricant maybe required).
5. First torque the 3/8" U-bolt to 30 lb-ft and then the M10 bolts to 51 lb-ft.
6. Raise exhaust into original position.

PERIODICALLY CHECK THIS RECEIVER HITCH TO ENSURE THAT ALL FASTENERS ARE TIGHT AND THAT ALL STRUCTURAL COMPONENTS ARE SOUND.

Curt Manufacturing LLC., warrants this product to be free of defects in material and/or workmanship at the time of retail purchase by the original purchaser. If the product is found to be defective, Curt Manufacturing LLC., may repair or replace the product, at their option, when the product is returned, prepaid, with proof of purchase. Alteration to, misuse of, or improper installation of this product voids the warranty. Curt Manufacturing LLC.'s liability is limited to repair or replacement of products found to be defective, and specifically excludes liability for incidental or consequential loss or damage.