

11438

VOLVO S40 / V50 WAGON

11/05/2020

GROSS LOAD CAPACITY WHEN USED AS A WEIGHT CARRYING HITCH: 2,000 LBS. TRAILER WEIGHT & 200 LBS. TONGUE WEIGHT.

*****DO NOT EXCEED VEHICLE MANUFACTURER'S RECOMMENDED TOWING CAPACITY.*****

WARNING: ALL NON-TRAILER LOADS APPLIED TO THIS PRODUCT MUST BE SUPPORTED BY AUXILIARY STABILIZING STRAPS.

**** FAILURE TO PROPERLY SUPPORT NON-TRAILER LOADS WILL VOID PRODUCT WARRANTY****

HAVING INSTALLATION QUESTIONS? CALL TECHNICAL SUPPORT AT 877-287-8634


Parts List			
ITEM	QTY	PART NUMBER	DESCRIPTION
1	4	10-10417	HHCS,M8x1.25,40,CL10.9,YZ
2	2	10-10370	HHCS,1/2-13 UNC,1-3/4,GRD8,YZ
3	2	CM-SP50	.250 x 1.00 x 1.50" ROUND HOLE SPACER
4	2	20-00062	NUT, SER-FLANGE,1/2-13 UNC,GRD8,YZ
5	4	30-00219	5/16" LOCK WASHER, YZ
6	4	30-00195	WASHER,FLAT,5/16,YZ

RUBBER ISOLATOR REMOVAL DIAGRAM

This technique can be used if and Exhaust Hanger Removal Pliers is not available.

Using a 5/8" open end wrench, slide the wrench up to the rubber isolator, cradling the hanger rod as shown. Next place the flat edge of a pry bar between the wrench and the hanger stop or hanger rod. Then simply rotate the pry bar toward the wrench to remove the rubber isolator.

Note: Using a spray lubricant or soapy water on the hanger rod and the rubber isolator helps removal.

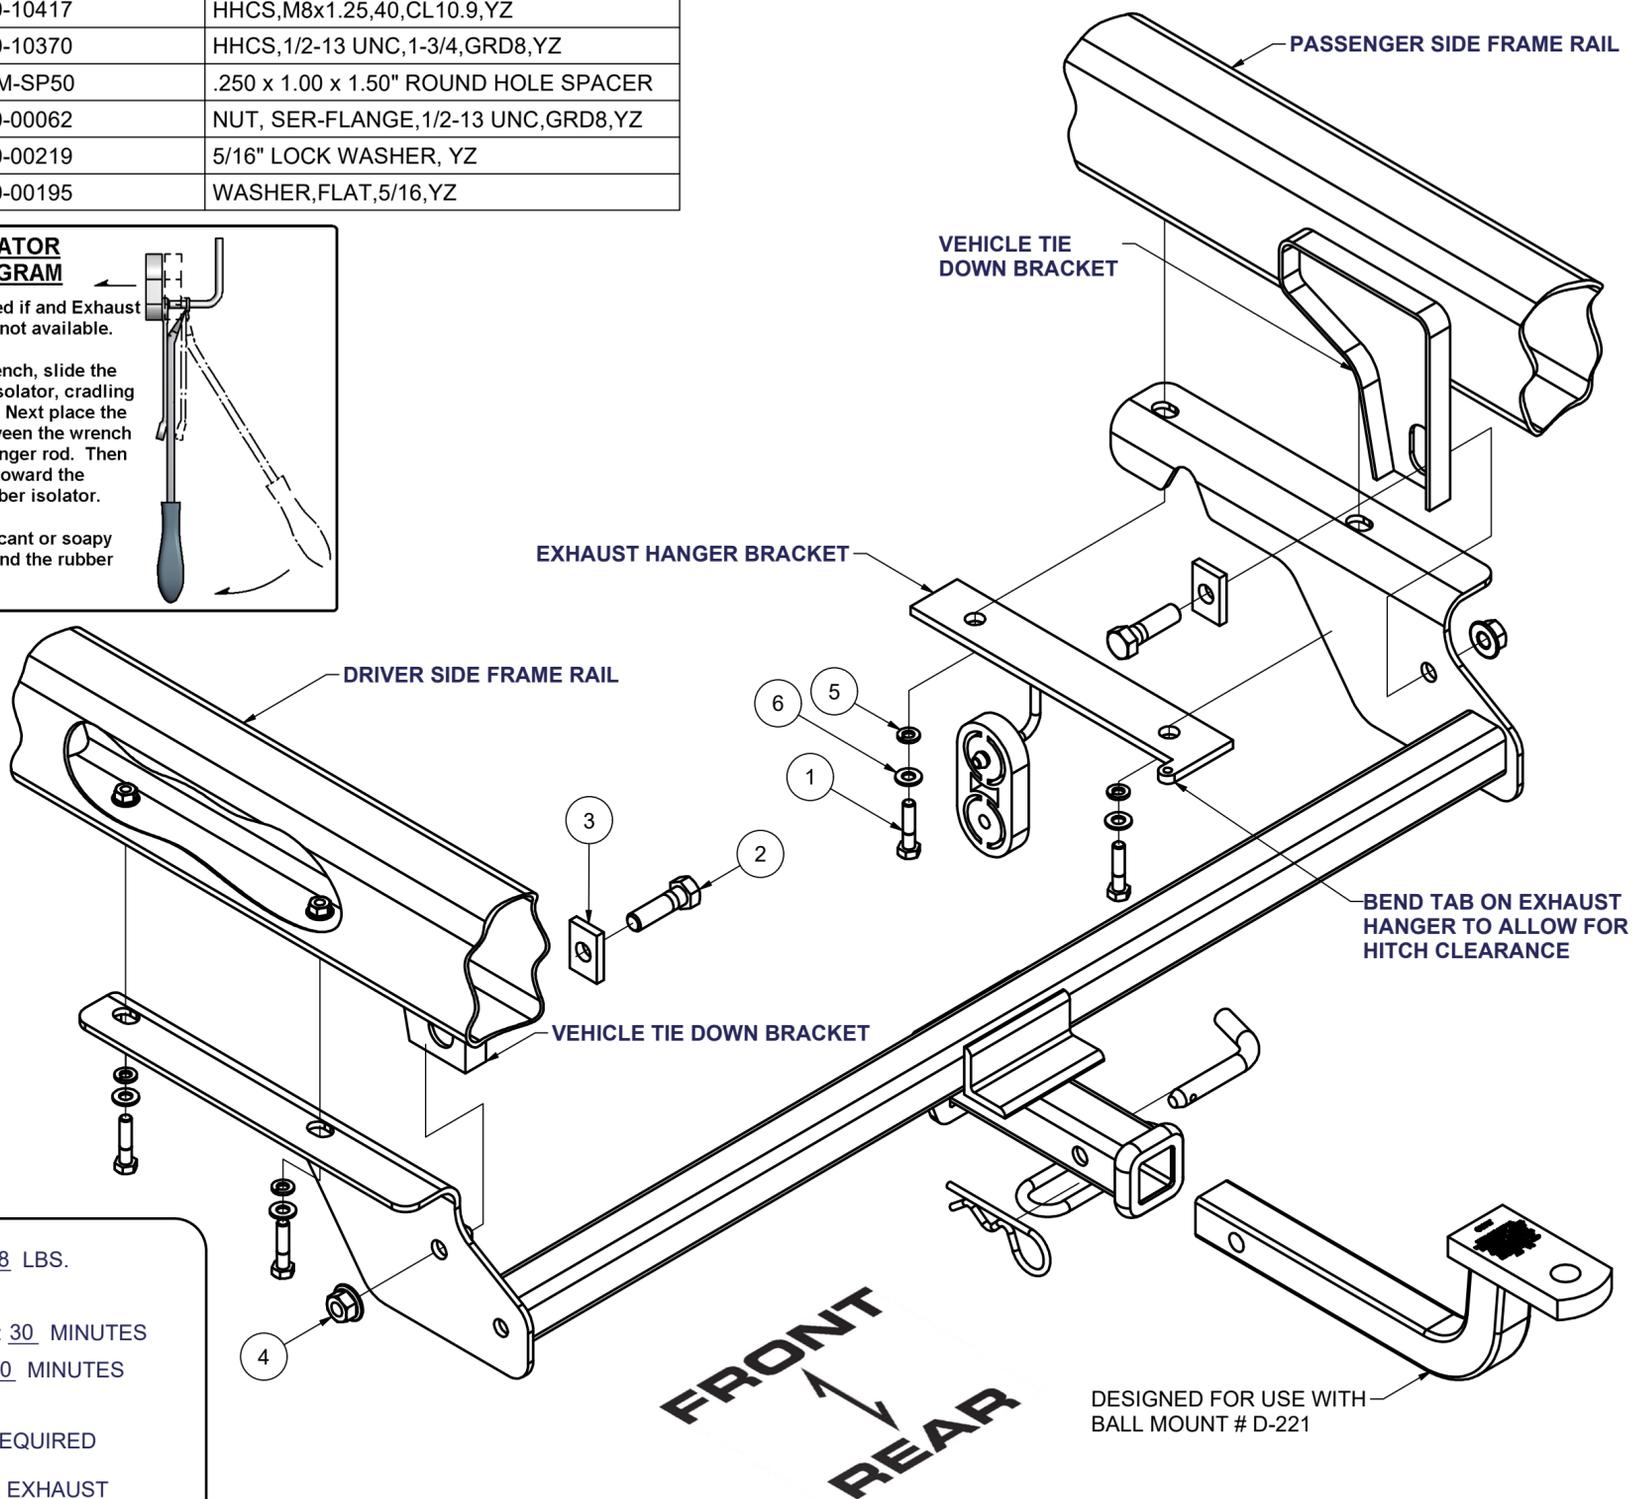

HITCH WEIGHT: 28 LBS.
 INSTALL TIME
 PROFESSIONAL: 30 MINUTES
 NOVICE (DIY): 60 MINUTES
 INSTALL NOTES:
 - NO DRILLING REQUIRED
 - LOWER / RAISE EXHAUST

INSTALLATION STEPS

- 1) Lower exhaust by removing two M8 bolts, each side. Discard bolts. (Note: Bend tabs on exhaust bracket to allow clearance for hitch.)
- 2) Raise hitch into position. Loosely install M8 x 40mm bolts and 5/16" conical washers, sandwiching hitch side bracket between frame rail and exhaust hanger bracket.
- 3) Install 1/2" fasteners thru hitch side brackets and vehicle tie-down bracket as shown.
- 4) Torque all M8 fasteners to 23 lb-ft, and all 1/2" fasteners to 110 lb-ft.

PERIODICALLY CHECK THIS RECEIVER HITCH TO ENSURE THAT ALL FASTENERS ARE TIGHT AND THAT ALL STRUCTURAL COMPONENTS ARE SOUND.

Curt Manufacturing Inc., warrants this product to be free of defects in material and/or workmanship at the time of retail purchase by the original purchaser. If the product is found to be defective, Curt Manufacturing Inc., may repair or replace the product, at their option, when the product is returned, prepaid, with proof of purchase. Alteration to, misuse of, or improper installation of this product voids the warranty. Curt Manufacturing Inc.'s liability is limited to repair or replacement of products found to be defective, and specifically excludes liability for incidental or consequential loss or damage.