

11534

85-88 NISSAN MAXIMA

12/10/2012

GROSS LOAD CAPACITY WHEN USED AS A WEIGHT CARRYING HITCH: 1,500 LBS. TRAILER WEIGHT & 150 LBS. TONGUE WEIGHT.



DO NOT EXCEED VEHICLE MANUFACTURER'S RECOMMENDED TOWING CAPACITY.

WARNING: ALL NON-TRAILER LOADS APPLIED TO THIS PRODUCT MUST BE SUPPORTED BY 18050 STABILIZING STRAPS.

** FAILURE TO PROPERLY SUPPORT NON-TRAILER LOADS WILL VOID PRODUCT WARRANTY**

HAVING INSTALLATION QUESTIONS? CALL TECHNICAL SUPPORT AT 1-877-287-8634

| Parts List | | | |
|------------|-----|------------------|---------------------------------------|
| ITEM | QTY | PART NUMBER | DESCRIPTION |
| 1 | 4 | 3/8" | LOCK WASHER |
| 2 | 4 | 3/8 - 16 | HEX NUT |
| 3 | 3 | 3/8-16 X 1 1/2 | HEX BOLT |
| 4 | 1 | 3/8-16 x 2.00 | HEX BOLT |
| 5 | 4 | 3/8" | FENDER WASHER |
| 6 | 2 | 7_16 FISHWIRE | 7/16" FISHWIRE |
| 7 | 2 | 7/16 WASHER | WASHER |
| 8 | 2 | 7/16 LOCK WASHER | HELICAL LOCK WASHER |
| 9 | 2 | 7/16-14 | HEX NUT |
| 10 | 2 | CM-SP2 | .250 x .88 x 2.25" SQUARE HOLE SPACER |
| 11 | 2 | 7/16-14 x 1 1/2 | CARRIAGE BOLT |

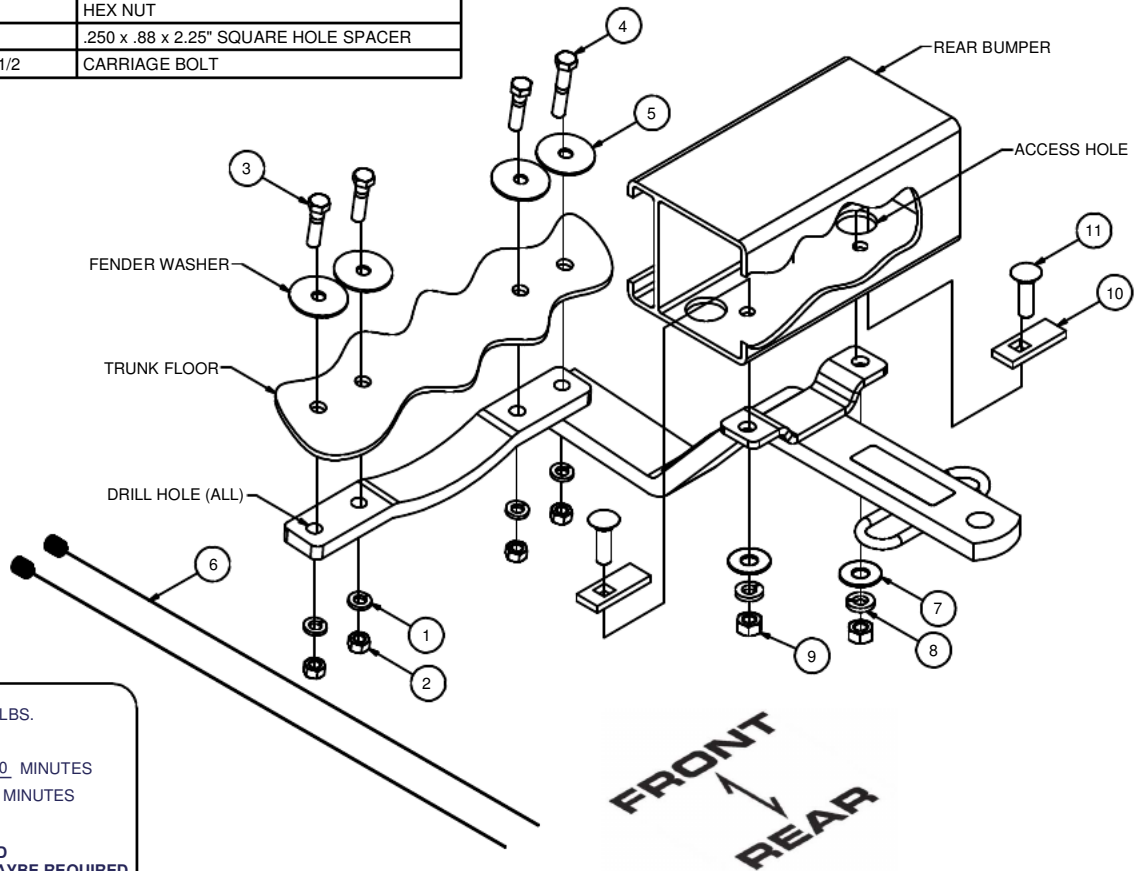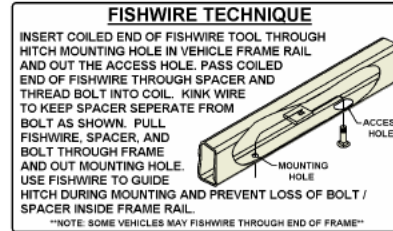

HITCH WEIGHT: 10 LBS.

INSTALL TIME

PROFESSIONAL: 30 MINUTES

NOVICE (DIY): 60 MINUTES

INSTALL NOTES:

- DRILLING REQUIRED
- FACIA TRIMMING MAYBE REQUIRED
- SILICONE SEAL HARDWARE

INSTALLATION STEPS

1. Hold the hitch in place against the underside of the floor and the rear bumper centered and square with the vehicle. Remove any material from the bumper that prevents the hitch from fitting flush with the metal bumper. Using the hitch as a template, mark the underside of the trunk floor and steel bumper for hitch mounting holes.
2. Drill (4) 13/32" holes in the trunk floor, and (2) 1/2" holes in the bumper beam.
3. If necessary make 1" diameter or larger access holes in the bumper to install fasteners. Fishwire technique can be used to pull bolts into place.
4. Install fasteners with large fender washer inside vehicle as shown.
5. Torque all 3/8" fasteners to 45 lb-ft and 7/16" fasteners to 70 lb-ft.
6. Use silicone sealant to seal hardware installed through trunk floor.

PERIODICALLY CHECK THIS RECEIVER HITCH TO ENSURE THAT ALL FASTENERS ARE TIGHT AND THAT ALL STRUCTURAL COMPONENTS ARE SOUND.

Curt Manufacturing Inc., warrants this product to be free of defects in material and/or workmanship at the time of retail purchase by the original purchaser. If the product is found to be defective, Curt Manufacturing Inc., may repair or replace the product, at their option, when the product is returned, prepaid, with proof of purchase. Alteration to, misuse of, or improper installation of this product voids the warranty. Curt Manufacturing Inc.'s liability is limited to repair or replacement of products found to be defective, and specifically excludes liability for incidental or consequential loss or damage.