

13536


2007 - 2009 ACURA RDX

11/17/2020

GROSS LOAD CAPACITY WHEN USED AS A WEIGHT CARRYING HITCH: 3,500 LBS. TRAILER WEIGHT & 300 LBS. TONGUE WEIGHT.
*****DO NOT EXCEED VEHICLE MANUFACTURER'S RECOMMENDED TOWING CAPACITY.*****



Parts List			
ITEM	QTY	PART NUMBER	DESCRIPTION
1	2	10-10370	HHCS, 1/2-13 UNC, 1-3/4, GRD8, YZ
2	4	30-00149	WASHER, S-CON, 1/2, YZ
3	2	10-10277	HHCS, M12x1.25, 40CL10.9, YZ
4	2	20-00174	HANDLE NUT

TOOLS REQUIRED
RATCHET
19mm SOCKET
TORQUE WRENCH



WELDNUT CLEANING

To remove debris from weldnuts in frame, spray lubricant or compressed air into hole. For heavy debris, use a small wire brush. (Be careful not to damage threads).

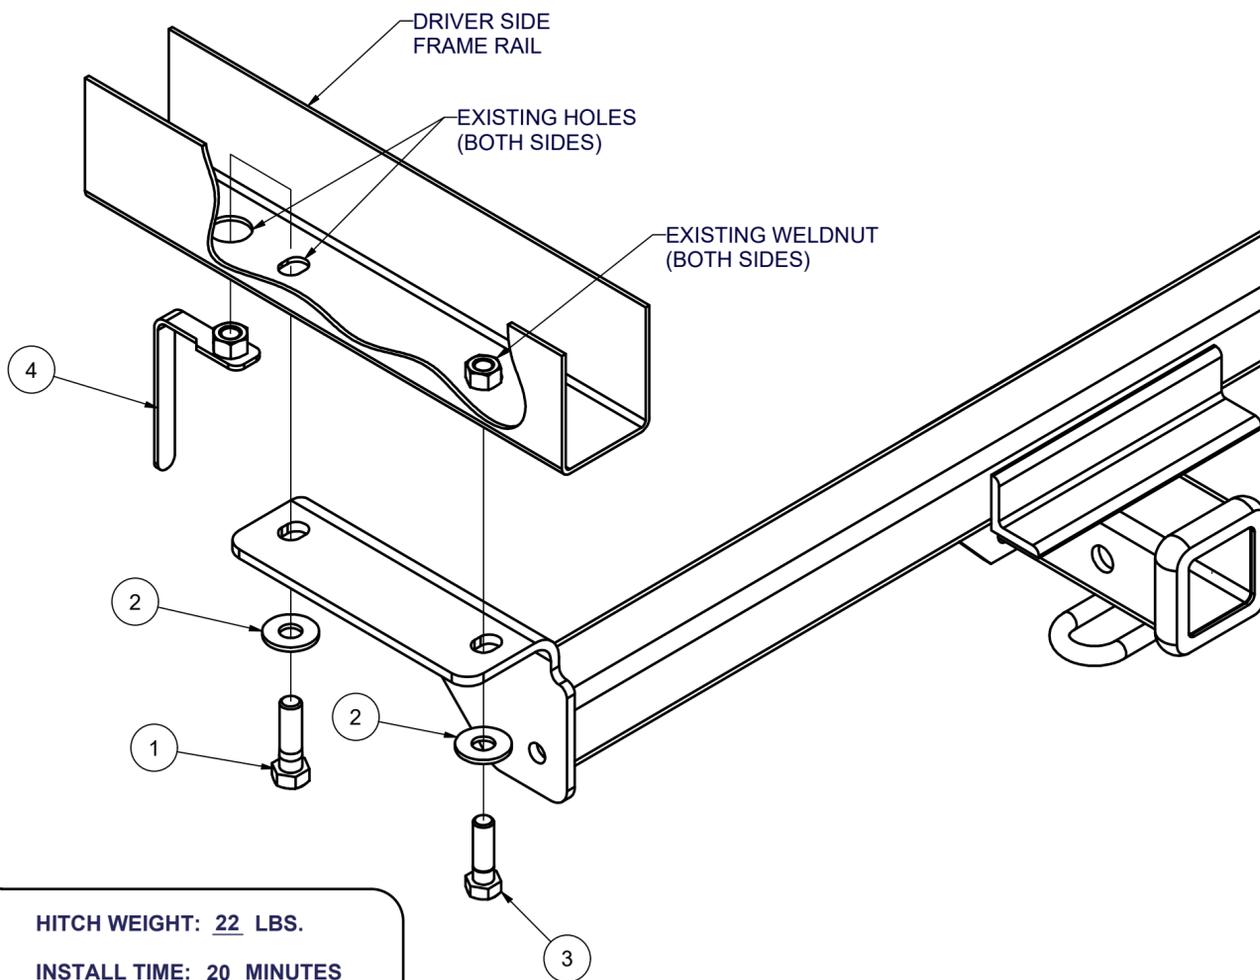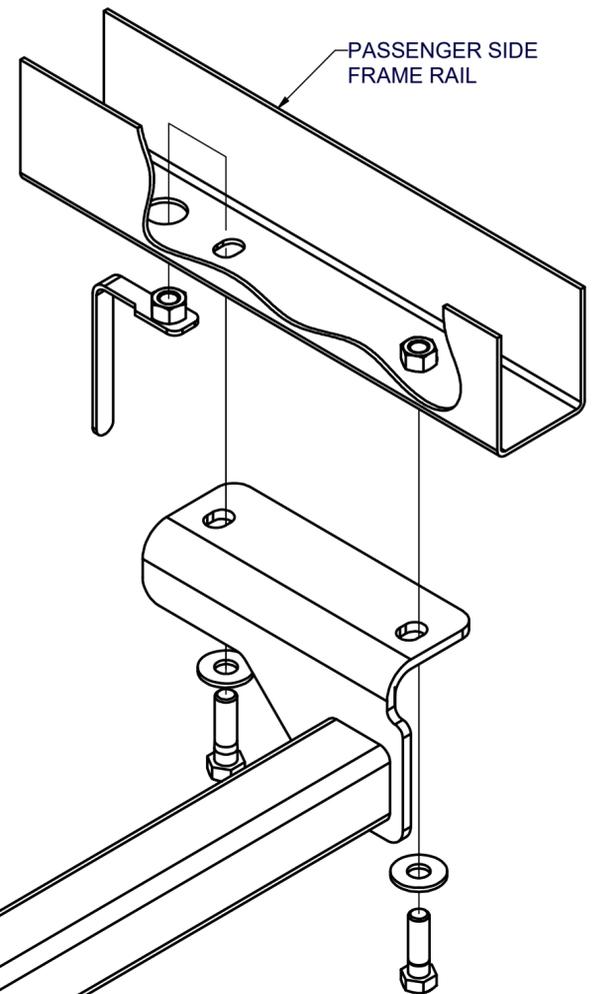

HITCH WEIGHT: 22 LBS.
 INSTALL TIME: 20 MINUTES
 INSTALL NOTES:
 - NO DRILLING REQUIRED

INSTALLATION STEPS

1. Raise hitch into position and align holes on hitch with holes in frame rail.
2. Install rearmost bolts hand-tight to secure hitch to frame.
3. Insert handle nuts bent as shown and install remaining hardware.
4. Torque M12 hardware to 79 lb-ft. and all 1/2" hardware to 110 lb-ft.

PERIODICALLY CHECK THIS RECEIVER HITCH TO ENSURE THAT ALL FASTENERS ARE TIGHT AND THAT ALL STRUCTURAL COMPONENTS ARE SOUND.

Curt Manufacturing Inc., warrants this product to be free of defects in material and/or workmanship at the time of retail purchase by the original purchaser. If the product is found to be defective, Curt Manufacturing Inc., may repair or replace the product, at their option, when the product is returned, prepaid, with proof of purchase. Alteration to, misuse of, or improper installation of this product voids the warranty. Curt Manufacturing Inc.'s liability is limited to repair or replacement of products found to be defective, and specifically excludes liability for incidental or consequential loss or damage.