



INSTALLATION MANUAL

51202

Level of Difficulty

Easy

Installation difficulty levels are based on time and effort involved and may vary depending on the installer level of expertise, condition of the vehicle and proper tools and equipment.

Parts List

Qty	Description
1	Control module
4	Self-tapping screws, 1/4"
1	Owner's tag

Tools Required

Cordless / electric drill or screwgun	Marker
Drill bit, 1/8"	Drive bits

⚠ WARNING

Never exceed the vehicle manufacturer's recommended towing capacity.

Product Photo



⚠ CAUTION

Do not use the module as a step for the trailer.

Stepping on the module may damage the system.

Moving parts can pinch, crush or cut. Keep clear at all times.

Not compatible with electric over hydraulic brakes

NOTICE

Visit www.curtmfg.com for a full-color copy of this instruction manual, as well as helpful videos, guides and much more!

Before you begin installation, read all instructions thoroughly.

Proper tools will improve the quality of installation and reduce the time required.

Images used in this document are for reference only when assembling, installing and / or operating this product. Actual appearance of provided and/or purchased parts and assemblies may differ.

The app is available on Apple App Store® for iPhone® and iPad® and also on Google Play™ for Android™ users.

Apple App Store®, iPhone®, and iPad® are registered trademarks of Apple Inc. Google Play™ and Android™ are trademarks of Google Inc.

Periodic inspection of your product should be performed to ensure all hardware and / or components remain secure.

Product Registration and Warranty

CURT stands behind our products with industry-leading warranties. To get copies of the product warranties, register your purchase or provide feedback, visit: curtmfg.com/registration

INSTALLATION

Step 1


Hold the control module against the roadside trailer frame and mark the locations for four pilot holes.

Note: Before positioning the module for marks, make sure there is adequate length on the attached front 7-way cord to connect to the tow vehicle.

Note: Place the module so it is level to the top of the frame where it is to be installed.

NOTICE

Be sure to mount the module horizontal and level to the trailer frame. Failure to correctly mount the module may cause the unit to not function as intended.

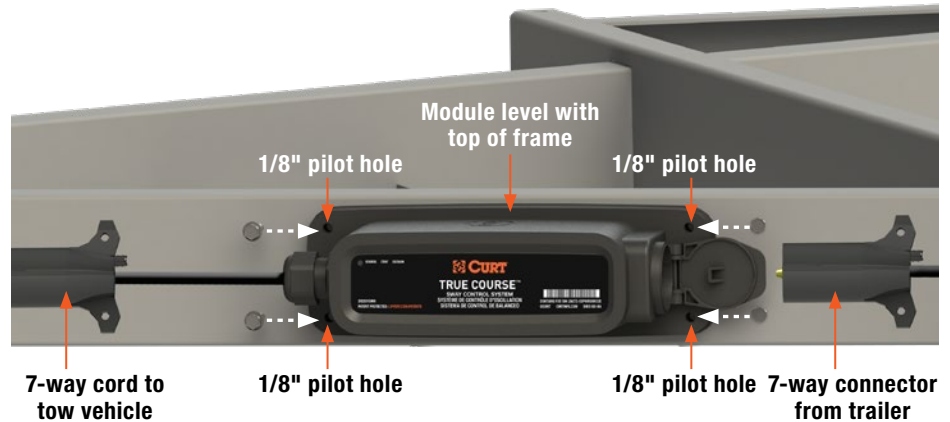

Step 2

Using a 1/8" bit, drill pilot holes for the four 1/4" self-tapping screws.

Install the screws to secure the module to the frame.



Step 3

Connect the attached 7-way cord to the tow vehicle.

Step 4

Attach the trailer's 7-way connector to the back of the control module.

OPERATION & SETUP

Before You Begin

Once the module is connected to the tow vehicle and the trailer's 7-way connector, the tow control system is active. Connect to OneControl® Auto or RV app for system status and notifications. Real-time updates will be provided. There is a label placed on the bar code on the owner's tag that will have all the Bluetooth information. Ensure your Bluetooth setting on your smartphone is enabled prior to pairing.

Determine Towing Scenario and Download App

Download and install the Lippert OneControl® Auto or RV app on a mobile smart device. Both apps are available on Apple App Store® for iPhone® and iPad® and also on Google Play™ for Android™ users.

IMPORTANT: Download and use the OneControl® RV app for RV applications and the OneControl® Auto app for trailer applications.

Note: The owner's tag is also a label and can be removed to be placed in the trailer for reference by the owner.



APP SETUP FOR RV USERS

Step 1

Download the OneControl® RV app from the app store.



Read and agree to the license agreement.

Follow the prompts in the app for connecting to an existing account or creating a new account.

Note: Make sure the 7-way connector from the trailer is plugged into the True Course™ controller and the 7-way cord from the controller is plugged into the tow vehicle with the engine running or that the 7-way plug has power.


Step 2

Tap the + icon and select 'Safety Systems' from the menu. From here, select 'Search for Devices' to begin pairing.

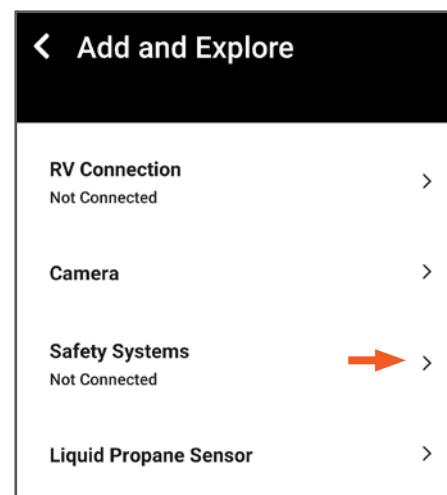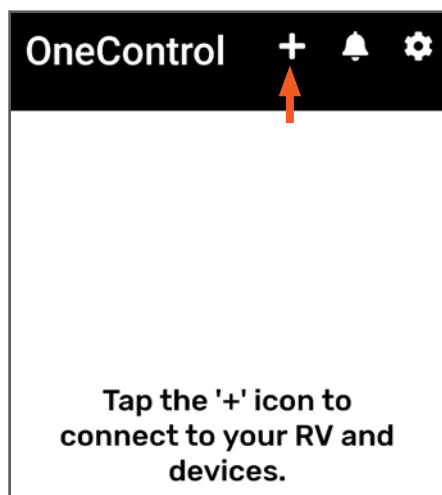


Step 3

Once device has been found, select the device by tapping the device description, and then tap 'connect' to begin pairing.

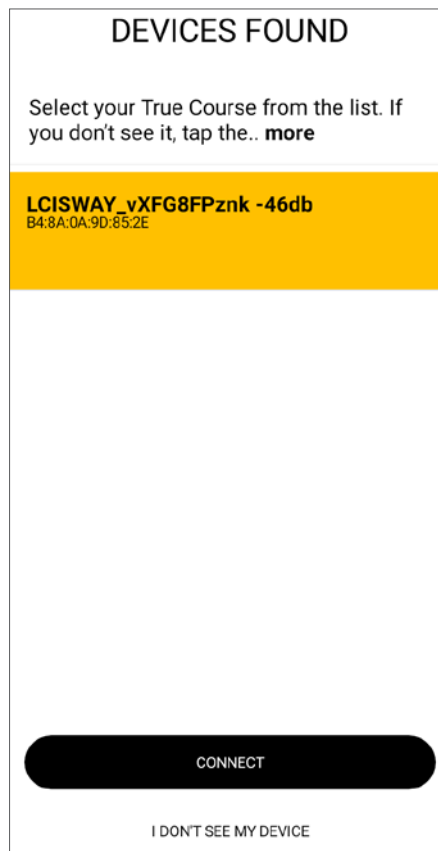

Step 4

To finalize pairing, enter the 6-digit PIN (PW) number when prompted. This number can be found on the owner's tag or on the bottom of the device.

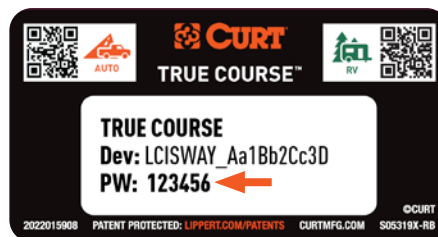

Step 5

Once the system has been connected, a message will indicate the True Course™ has connected successfully.



APP SETUP FOR AUTO USERS

Step 1

Download the OneControl® Auto app from the app store.


Read and agree to the license agreement.

Follow the prompts in the app for connecting to an existing account or creating a new account.

Note: Make sure the 7-way connector from the trailer is plugged into the True Course™ controller and the 7-way cord from the controller is plugged into the tow vehicle with the engine running or that the 7-way plug has power.


Step 2

From the home menu, tap the 'Pair Device' button under the True Course™ icon.

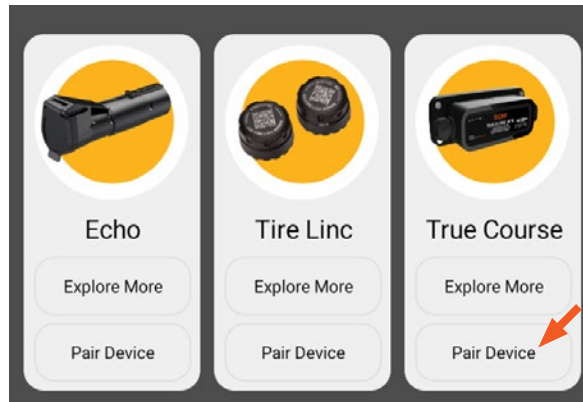


Step 3

Once device has been found, select the device by tapping the device description, and then tap 'connect' to begin pairing.

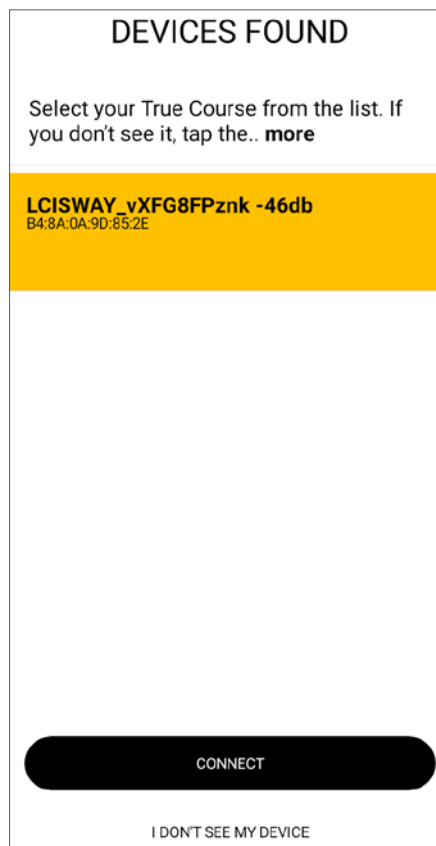

Step 4

To finalize pairing, enter the 6-digit PIN number when prompted. This number can be found on the owner's tag or on the bottom of the device.

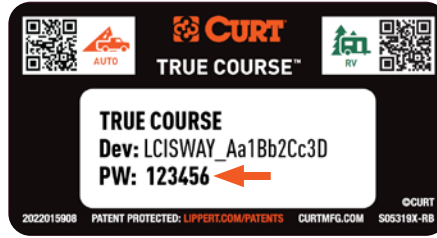

Step 5

Once the system has been connected, a message will indicate the True Course™ has connected successfully.

TOWING BASICS & SAFETY INFORMATION

For information on safely towing your trailer, visit curtmfg.com/understanding-towing.

TROUBLESHOOTING

NOTICE

Diagnostic trouble codes (DTC) blinks: One green blink followed by red count; pattern repeats until issue is corrected.

If there are multiple DTCs, the blink pattern is green then DTC #1 count, then green then DTC #2 count. This continues until all DTCs are accounted for, then the pattern repeats

Should issues persist, contact CURT technical support to speak to a representative that can assist further.

Light Flash (Status)	Problem Cause	Possible Solution
Off (NO LIGHT)	Unit is not powered and not active (OFF and NOT MONITORING). Activate trailer brakes to turn on.	Unit is in low power. Activate tow vehicle brake to wake unit. Verify the 7-way connection to unit. Unit is powered by tow vehicle and trailer battery through the 7-way.
3 Green, 3 Red, 3 Blue, Solid Green	Wake-up self-checks are in progress.	No action.
Green Solid	Unit is awake and monitoring for sway.	Every 5 seconds, there will be a brief time the Green LED turns off for a fraction of a second. This indicates the unit is functional.
Red blink (1/2 second on, 1/2 second off, repeats)	True Course™ detected a sway event and is active.	After sway event subsides, light will return to green.
1 Green, 1 Red	Low voltage condition detected.	Check battery connection and determine voltage of the battery is within proper operating range (9 - 16 volts).
1 Green, 2 Red	Voltage is too low for True Course™ operation.	The battery may read normal battery range, but during the units power check it determined the voltage dropped. Ensure the battery is fully charged.
1 Green, 3 Red	High voltage condition detected.	Check battery connection and determine voltage of the battery is within proper operating range (9 - 16 volts). Check all connections at module and tow vehicle.
1 Green, 4 Red	A short to 12 volt detected on the brake actuator output.	Verify the breakaway switch is not activated. Verify blue brake wire not shorted to 12 volt.
1 Green, 5 Red	Not connected to trailer brakes.	Verify the blue brake wire is connected to trailer brakes. Verify the 7-way is properly seated in the unit.
1 Green, 6 Red	A short to ground is detected on the brake wire output.	Verify the blue brake wire is not shorted to ground or trailer frame. Disconnect harness, wait 10 seconds.
1 Green, 8 Red	Internal load check issue.	Check 7-way connection to module and to tow vehicle. Make sure the pins are making good contact. Disconnect harness, wait 10 seconds.
1 Green, 9 - 14 Red	Trailer light issues detected.	Verify all trailer lamps are functional.
1 Green, 15 Red	Module hardware issue detected.	Disconnect the module completely, then reconnect. If issues persists, bypass module with trailer. 7-way and plug directly into tow vehicle.
Red Solid	Unit is not functional.	Disconnect the harness from the tow vehicle and disconnect trailer harness. Wait 10 seconds. Connect harness. If light becomes solid red, unplug unit and contact service department.
Red Fast Blink (100 ms on, 100 ms off, repeats)	Unit is in reflash mode.	If reflashing, wait for process to complete. If reflash was not requested, Disconnect the module and wait 10 seconds.
5 seconds Green, then 2 seconds Blue	Active BLE Connection.	Wait for LED codes to finish to allow the process to complete.
1 second Blue, 1 second off	BLE Pairing.	Wait for LED codes to finish to allow the process to complete.