

INSTALLATION MANUAL

Level of Difficulty

Easy

Installation difficulty levels are based on time and effort involved and may vary depending on the installer level of expertise, condition of the vehicle and proper tools and equipment.

Tools Required

Flathead screwdriver Side cutters

Maintenance

Periodic inspection of all wires and connections should be performed to ensure there is no visible damage or loose connections.

Wiring Location(s)


BH1

⚠ WARNING

Do not exceed product rating or tow vehicle lamp load rating, whichever is lower.

Be sure not to lay tools across the positive (typically noted with red covers or a red '+' symbol). This can cause a ground to short causing sparks and / or electrical shocks.

Product Photo

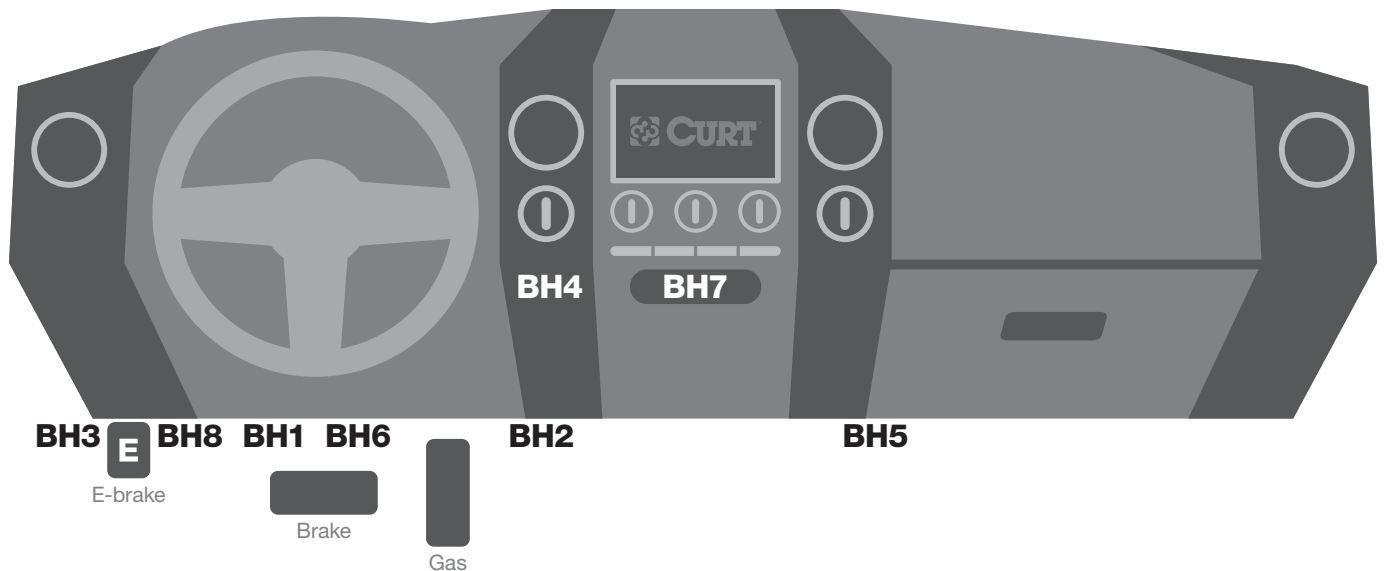

NOTICE


Before you begin installation, read all instructions thoroughly.

Proper tools will improve the quality of installation and reduce the time required.

All steps must be followed to ensure the product will function properly. Once installed, test for proper function by using a test light or connecting a properly wired trailer.

Step 1

Open the driver-side door. Look above the driver-side kick panel to locate a white housing taped to a group of wires halfway between the front edge of the dash and the firewall.

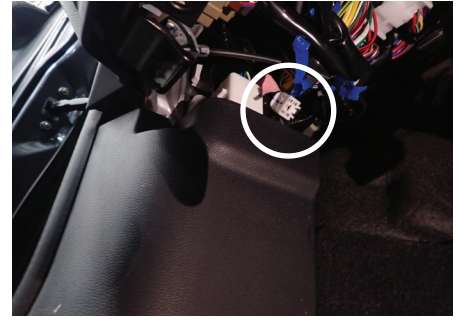

Step 2

Attach the custom jumper harness to the vehicle harness and route it to the brake controller. Zip tie the wiring as needed to secure the harness up and out of the way of the driver's feet.