


INSTALLATION INSTRUCTIONS

⚠ WARNING: DO NOT EXCEED PRODUCT RATING OR TOW VEHICLE LAMP LOAD RATING, WHICHEVER IS LOWER

APPLICATIONS

Make	Model
Acura	MDX

CUSTOM WIRING HARNESS

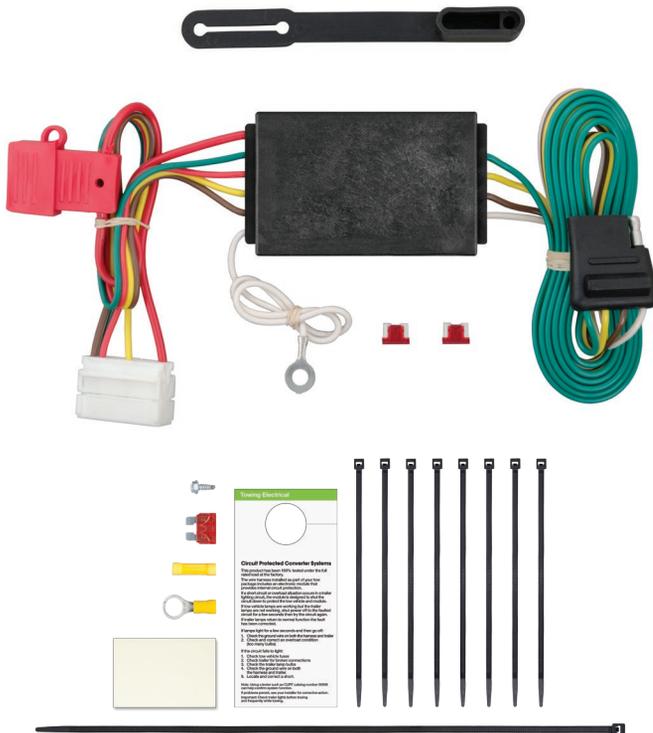

WIRING LOCATION GUIDE

SUVs, MINI & FULL-SIZED VANS (S)

Representative vehicle shown below

S3 - Behind driver side rear access panel



NOTICE

All steps must be followed to ensure the wiring harness will function properly. Once installed, test for proper function by using a test light or connecting a properly wired trailer.

TOOLS NEEDED

Flat blade screwdriver

⚠ WARNING

The battery connection must be fuse-protected, 10-amp max. Exceeding the product rating can cause loss of warranty, overheating and potential fire. Do not exceed product rating or tow vehicle lamp load rating, whichever is lower.

Signal Circuits - 3.0 amps per side

Tail / Running Circuits - 6.0 amps total

Check vehicle owner's manual or contact the vehicle manufacturer for more information.

INSTALLATION / SAFETY INSTRUCTIONS

Step 1

Open the hatch and lift up on the storage lid (A,B). Locate the access panel on the driver's side rear trim panel (C).

Step 2

Remove the access panel to locate the vehicle's electrical junction box (D).

Step 3

Starting in the cargo area on the driver's side, route the white housing end of the harness under the trim panel up to the junction box. Insert the white housing of the wiring harness into the receptacle in the junction box (E).

Step 4

In the electrical junction box, locate the two fuse placements. Insert the 10 amp low profile fuse in position 2 and the 7.5 amp low profile fuse in position 11 (E).

Step 5

Locate a suitable grounding point near the connector such as an existing screw with nut in the vehicle frame or drill a 3/32" pilot hole for the provided screw. The area should be free of rust, dirt and paint. Secure the white ground wire using the ring terminal and provided screw. (F)

 **WARNING:** Check for miscellaneous items that may be hidden behind or under any surface before drilling to avoid damage and / or personal injury.

Step 6

Locate a flat spot inside the vehicle. Adhere the black converter box using the provided double-sided tape (G).

Step 7

When in use, route the 4-flat to the center of the vehicle. When not in use, roll up and store in a convenient, out of the way location (H). Secure any loose wires with the provided cable ties.

Step 8

Install the 10 amp fuse that is provided into the red fuse holder located on the product wiring harness.

Step 9

Reinstall all items removed during install. Install the provided 4-flat dust cover to help prevent corrosion.

